


STEP UP TO THE LUXURY OF OUR PRIVÉ COLLECTION




GRANO 1307

9" x 60" x 7.5"mm with a 22 mil wear layer

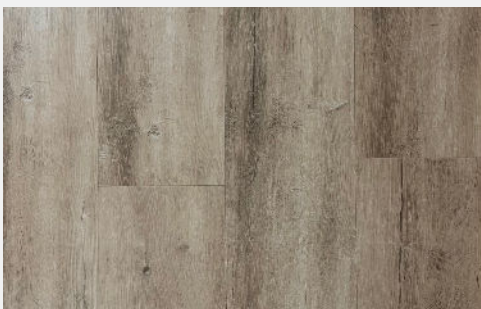


PLATANO 1405

9" x 60" x 7.5"mm with a 22 mil wear layer

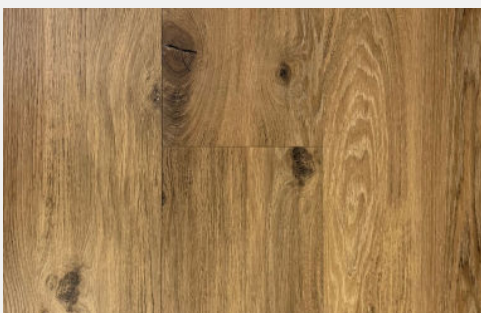


SCURO 1461

9" x 60" x 7.5"mm with a 22 mil wear layer

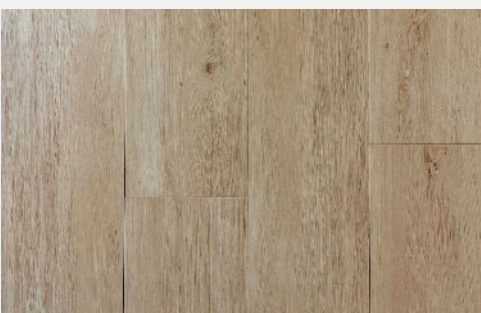

PULITO 1518

9" x 60" x 7.5"mm with a 22 mil wear layer

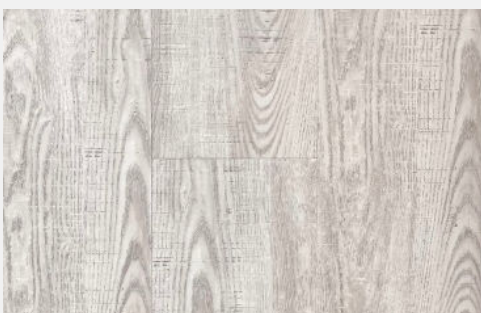

INVERNO 8050

9" x 60" x 7.5"mm with a 22 mil wear layer

- **EMBOSSED IN REGISTER TEXTURE**
- **LARGER AND THICKER PLANK**
- **WIDE BEVEL**
- **MATTE FINISH**

	PRODUCT SPECIFICATION	STANDARD	4mm 12 MIL SPC Click	4 mm. 22 MIL SPC Click
	Total Thickness	ISO 24337	7,5 mm	4,00 mm (5,00 mm with pad).
	Thickness of Wear Layer		0,30mm(12 MIL)	0,55 mm(22 MIL)
	Total Weight	EN ISO 23997	7.850 kg/m ²	7.140 kg/m ²
	Usage Classification	EN 16511	Class 23 / Class 33	Class 23 / Class 34
	Plank Size	ISO 24337	Click: 7"x48" Click: 9"x48"	Click : 7"x48" Click : 9"x48"
	Packaging Per Carton: Planks		Click: 7"x48"- 23.33 SqFT/box -10 pcs. Click: 9"x48"- 24.00 SqFT/box -8 pcs.	Click: 7"x48"- 23.33 SqFT/box -10 pcs. Click: 9"x48"- 24.00 SqFT/box -8 pcs.
	Underlayment optionally IXPE		+ 1mm IXPE Underlay	+ 1mm IXPE Underlay
	Surface treatment (UV)		Yes	Yes
	Beveled Edges		Yes -Micro Bevel	Yes -Micro Bevel
	Dimensional Stability	EN-ISO 23999	≤0,15%	≤0,15%
	Reaction to Fire	EN 13501-1	Class 1	Class 1
	Residual Indentation	ISO 24343-1	≤ 0,05 mm	≤ 0,05 mm
	Furniture Leg	EN 424	No damage	No damage
	Castor Chair	ISO 4918 - EN 425	No change	No change
	Locking Strength	ISO 24334	Longitudinal joint: 3.7 kN/m, Trans joint 3.6 kN/m	Longitudinal joint: 3.4 kN/m, Trans joint 3.6 kN/m
	Impact Sound Reduction with 1mm IXPE Underlay	EN ISO 717-2	21 dB	19 dB
	Light Fastness	EN ISO 105-B02	6	6 -7
	Resistance to Staining	EN 438-2	Groups 1 - 3: grade 5	Groups 1 - 3: grade 5
	Micro Scratch Resistance	EN 16094	MSR-A2	MSR-A2
	Impact Resistance	EN 13329 Annex F	> 1800 mm	> 1800 mm
	Abrasion Resistance	EN 13329 Annex E	≥ 2000 cycles	≥ 4000 cycles
	Thermal Resistance	EN 12664	0,0160 m ² K/W	0,0177 m ² K/W
	Slip Resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30 DS	R9 μ ≥ 0,30 DS
	Static Electrical Propensity	EN 1815	≤2kV	≤2kV
	Formaldehyde	EN 717-1:2014	E1 (Formaldehyde Free)	E1 (Formaldehyde Free)
	STC Sound Testing with 1mm IXPE Underlay	ASTM 492-09	STC 60	STC 60
	IIC Sound Testing with 1mm IXPE Underlay	ASTM E 989-18	IIC 66	IIC 66
	Pentachlorophenol (PCP)	CP 491510-01	PCP Free	PCP Free
	Floor Heating System	Yes suitable, see separate installation instructions.	Max. 29° C	Max. 29° C
	FloorScore	Indoor Air Quality Certified to SCS-EC10.3-2014 v4.0	SCS-FS-05915	SCS-FS-05915
	TVOC	EN 16516 , ISO 16000	A+	A+

